

CT-290-SP Cleaning Turret




Low profile (290mm) in-chute automated water turret for standard pressure (SP) applications.

Features

- Compact design enables positioning in the tightest of locations.
- Continuous (360°) slew and beyond horizontal (250°) luff enables line of sight targeting from any position.
- Armoured exterior shell
- 1.5" water cannon with variable nozzle options
- Replaceable unit. No maintenance required.

Product

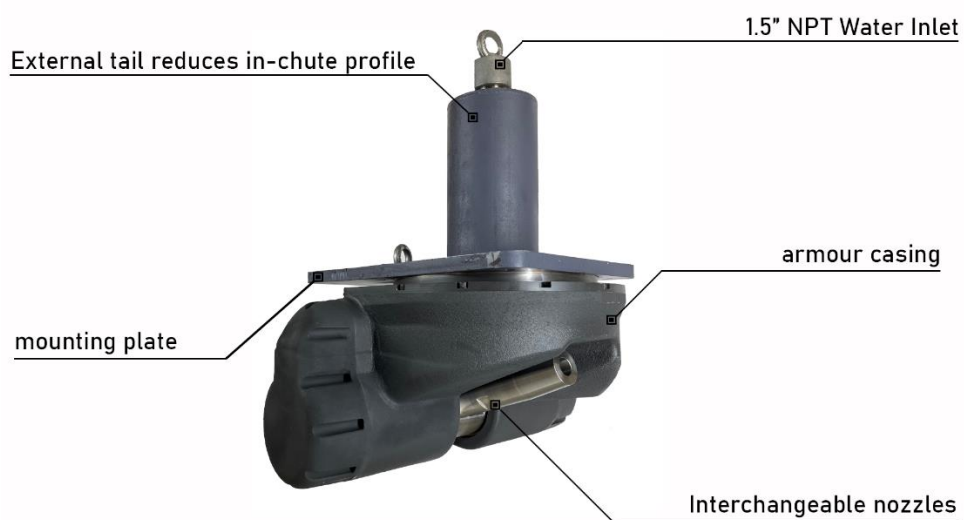

Specifications

Luff motion

Range	250°	Degree
Minimum step resolution	0.02	Degree / step
Max rapid speed	10	Degree / second

Slew motion

Range	360°	Degree
Minimum step resolution	0.006	Degree / step
Max rapid speed	10	Degree / second

Water cannon

Inlet	1.5"	NPT Male
Outlet	1.5"	NPT Female
Nozzle	0.25" to 1.5"	

Mounting

Mounting hole diameter	150	mm
Hole centres	250mm	square
Drill diameter	20	mm

Electrical connections

Connections	2 x 10 pin
-------------	------------

